



workplace matting solutions

 edgewood
matting

Edgewood strives to be uniquely better.

Edgewood's brand promise is borne by the notion that even in situations when most things are equal, there is still opportunity to make a positive difference.

Edgewood is the largest full service wholesaler of matting, athletics and flooring products in Canada.

We specialize in the supply and installation of premium products coupled with excellent customer service. We are a member of the Canada Green Building Council and can assist with projects that are seeking green certification. Many of our products are manufactured with recycled content taken from both post-industrial and post-consumer recycled material.



anti-fatigue matting

Work Matta™ Comfort Open Top.....	5
Work Matta™ Comfort Solid Top.....	5
Stand Easy Solid Top.....	6
Stand Easy Open Top.....	6
Stand Easy Premier Open Top.....	7
Stand Easy Premier Solid Top.....	7
Cushion Tile.....	8
Personal Comfort Station.....	8
Weldeez™.....	9
Weldeez™ Modular.....	9
3M™ Safety-Walk™ Cushion Matting 5100.....	10
Plasti-Grip Industrial.....	10
Competitor Series.....	11
Journeyman.....	11
Executive.....	12
Apprentice.....	12
Work Matta™ Excel Solid Top.....	13
Work Matta™ Excel Open Top.....	13
Work Matta™ Ergo Solid Top.....	14
Work Matta™ Ergo Open Top.....	14
Foam Fusion™.....	15
Competitor Series Light.....	15
Kineta-Flex™.....	16
3M™ Safety-Walk™ Cushion Matting 5270.....	16
Flex Comfort Drain.....	17
Plasti-Grip.....	17
Value Flex Solid Top.....	18
Value Flex Open Top.....	18
Value Flex Plus.....	19
Bubble Mat.....	19
3M™ Safety-Walk™ Cushion Matting 3270.....	20
Airsoft™ Ribbed.....	20
Airsoft™ Plus Pebbled.....	21
Airsoft™ Pebbled.....	21

industrial matting

Diamond Rubber.....	23
Diamond Vinyl Commercial.....	23
Wide Rib Nitrile.....	24
Wide Rib Rubber.....	24
Fine Rib Rubber.....	25
Weldeez™ Roll.....	26
Smooth Rubber.....	26
Diamond Plate Runner.....	27
Wide Rib Vinyl.....	27
Fine Rib Vinyl.....	28

specialty matting

Airsoft™ Anti-Stat.....	30
Anti-Stat.....	30
Switchboard Class 2.....	31
Switchboard Class 3.....	31
Coco Mat.....	32
Coir Matting.....	32
3M™ Safety-Walk™ Wet Area Matting 1500.....	33
3M™ Safety-Walk™ Wet Area Matting 3200.....	33
V-Dek.....	34
Plasti-Grip 4D.....	34
Shower Eyewash Station Mats.....	35
Clean Room Mat.....	35
Disinfectant Mat.....	36
Disinfectant Mat (Shallow Well).....	36

accessories

Grit Tape.....	38
Anti-Stat Ground Cord.....	38
Wrist Band Ground Cord.....	38
Heel Gronder Cup Style.....	38
Kneezeez.....	39
Rubber Boot Scraper.....	39
Rubber Boot Tray.....	39

anti-fatigue matting

Choose an anti-fatigue mat from Edgewood and help reduce musculoskeletal disorders (MSDs) caused by standing for long periods of time.

Fatigue in the workplace has a direct correlation to decreased productivity and increased accidents. Keep your workplace running smoothly with anti-fatigue matting that decreases discomfort and tiredness associated with standing for a long time on a hard surface. This matting can also reduce MSDs in the back, neck and lower extremities.

Find the right anti-fatigue matting for your working environment and reduce fatigue in your workplace with Edgewood.

Work Matta™ Comfort Open Top




HEAVY DUTY

VERY DURABLE TILE DESIGNED TO WITHSTAND HEAVY LOADS AND HARSH WORK ENVIRONMENTS

- Easy to install.
- Customizable modular interlocking system.
- Open top surface allows for drainage.
- Also available in a grit surface for increased traction.

PERFECT FOR: industrial facilities, manufacturing and heavy loads

construction	Recycled PVC
edging	Available
thickness	1 in. (25 mm.)
total weight	2.6 kg. (5.8 lbs.)
warranty	10 year
recycled content: 100%	

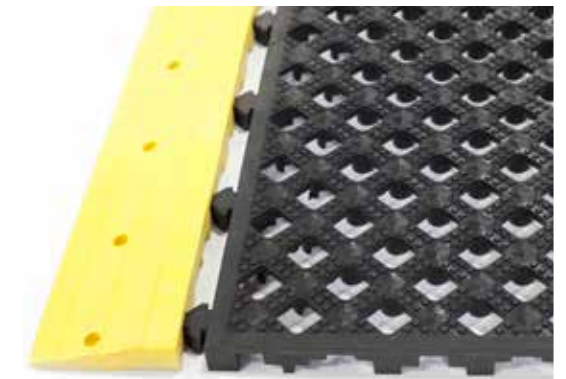

size	part code
20 in. x 20 in. (0.5 m. x 0.5 m.)	OOS222020
FEMALE CORNER	OCFCC0424
MALE CORNER	OCMCC0424
FEMALE EDGE	ORFCC0420
MALE EDGE	ORMCC0420
Accessory colours: 22 Black, 37 Yellow CC = Colour number	

Work Matta™ Comfort Solid Top




HEAVY DUTY

VERY DURABLE TILE DESIGNED TO WITHSTAND HEAVY LOADS AND HARSH WORK ENVIRONMENTS

- Easy to install.
- Customizable modular interlocking system.
- Solid top for dry areas.
- Also available in grit surface for increased traction or ESD for electrically sensitive equipment.

PERFECT FOR: industrial facilities, manufacturing and heavy loads

construction	Recycled PVC
edging	Available
thickness	1 in. (25 mm.)
total weight	3.3 kg. (7.3 lbs.)
warranty	10 year
recycled content: 100%	

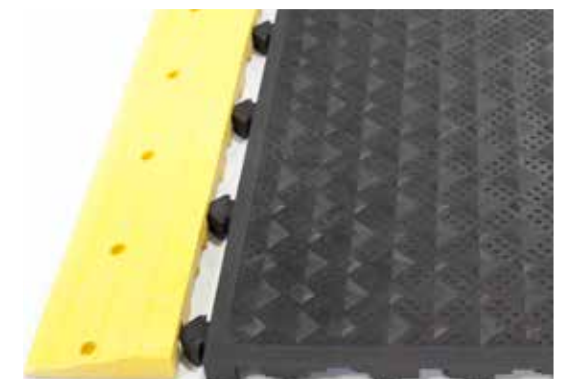

size	part code
20 in. x 20 in. (0.5 m. x 0.5 m.)	OSS222020
FEMALE CORNER	OCFCC0424
MALE CORNER	OCMCC0424
FEMALE EDGE	ORFCC0420
MALE EDGE	ORMCC0420
Accessory colours: 22 Black, 37 Yellow CC = Colour number	

Specifications subject to change without notice. See product info sheet for more details.

Stand Easy Solid Top



HEAVY DUTY

VERSATILE ANTI-FATIGUE MAT WITH A FULLY MODULAR DESIGN

- Interlocking system makes it an excellent choice for building custom work areas.
- Solid top surface is easy to keep clean.

PERFECT FOR: workstations, machine operating and assembly lines

construction	Rubber (natural/recycled)
face style	Solid
edging	Modular
thickness	5/8 in. (16 mm.)
total weight	9.1 kg. (20 lbs.)
warranty	3 year
recycled content: 20%	



size	part code
3 ft. (0.9 m.) x 3 ft. (0.9 m.)	SES220303
FEMALE EDGE BLACK	FED221903
FEMALE EDGE YELLOW	FED371903
MALE EDGE BLACK	MED221903
MALE EDGE YELLOW	MED371903

Stand Easy Premier Open Top

HEAVY DUTY

NITRILE ANTI-FATIGUE MAT WITH HIGH RESISTANCE TO GREASE

- Versatile mat with a full modular design.
- Interlocking system makes it an excellent choice for building custom work areas.
- Open top surface allows for easy drainage of fluids.

PERFECT FOR: kitchens, mechanic shops, manufacturing and the oil and gas industry

construction	Rubber (nitrile)
face style	Perforated
edging	Modular
thickness	5/8 in. (16 mm.)
total weight	6.8 kg. (15 lbs.)
warranty	5 year



size	part code
3 ft. (0.9 m.) x 3 ft. (0.9 m.)	SPO220303
FEMALE EDGE BLACK	FED221903
FEMALE EDGE YELLOW	FED371903
MALE EDGE BLACK	MED221903
MALE EDGE YELLOW	MED371903

Stand Easy Open Top



HEAVY DUTY

VERSATILE ANTI-FATIGUE MAT WITH A FULLY MODULAR DESIGN

- The interlocking system makes it an excellent choice for building custom work areas.
- Open top surface allows easy flow of fluids.

PERFECT FOR: workstations, machine operating and assembly lines

construction	Rubber (natural/recycled)
face style	Perforated
edging	Modular
thickness	5/8 in. (16 mm.)
total weight	6.8 kg. (15 lbs.)
warranty	3 year
recycled content: 20%	



size	part code
3 ft. (0.9 m.) x 3 ft. (0.9 m.)	SEO220303
FEMALE EDGE BLACK	FED221903
FEMALE EDGE YELLOW	FED371903
MALE EDGE BLACK	MED221903
MALE EDGE YELLOW	MED371903

Stand Easy Premier Solid Top

HEAVY DUTY

NITRILE ANTI-FATIGUE MAT WITH HIGH RESISTANCE TO GREASE

- Versatile mat with a full modular design.
- Interlocking system makes it an excellent choice for building custom work areas.
- Easy to clean solid top surface.

PERFECT FOR: kitchens, mechanic shops, manufacturing and the oil and gas industry

construction	Rubber (nitrile)
face style	Solid
edging	Modular
thickness	5/8 in. (16 mm.)
total weight	9.1 kg. (20 lbs.)
warranty	5 year



size	part code
3 ft. (0.9 m.) x 3 ft. (0.9 m.)	SPS220303
FEMALE EDGE BLACK	FED221903
FEMALE EDGE YELLOW	FED371903
MALE EDGE BLACK	MED221903
MALE EDGE YELLOW	MED371903

Cushion Tile




HEAVY DUTY

EXCELLENT CHEMICAL RESISTANCE IN AN INTERLOCKING MODULAR ANTI-FATIGUE TILE

- Open top construction enables drainage while still providing support.
- Available with a grit top surface for increased slip resistance.

PERFECT FOR: wet areas, machining and manufacturing

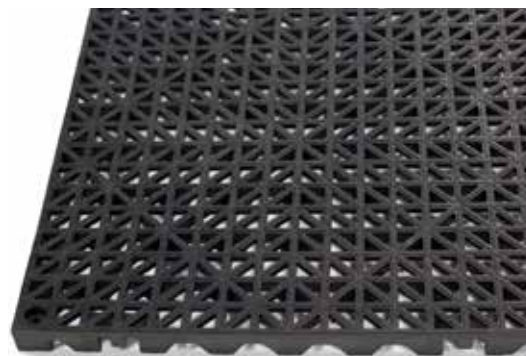

#22 BLACK

construction	Recycled PVC
edging	Available
thickness	3/4 in. (19.1 mm.)
total weight	0.7 kg. (1.5 lbs.)
warranty	1 year
recycled content: 100%	

size	part code
1 ft. (0.3 m.) x 1 ft. (0.3 m.)	CTQ220101
MALE CORNER	CMCCC0000
FEMALE CORNER	CFCCC0000
MALE EDGE	CMECC0000
FEMALE EDGE	CFECC0000
GRIT TOP	CTG220101
Accessory colours: 22 Black, 37 Yellow CC = Colour number	

Weldeez™

HEAVY DUTY

EXTREMELY EFFECTIVE WELDING MAT DESIGNED TO WITHSTAND SPARKS, WELDING FLUX AND SLAG

- Capable of withstanding temperatures up to 1500°C.
- Highly grease-resistant.
- Provides a comfortable surface.
- Superior durability.
- Available in linear interlocking and individual mats.

PERFECT FOR: welders, forges, machinists and the oil and gas industry



#22 BLACK

construction	Rubber (specially compounded nitrile)
face style	Domed bubble top
edging	Integrated
thickness	1/2 in. (12.5 mm.)
total weight	9.1 kg. (20 lbs.)
flammability	Flame resistant
warranty	5 year

size	part code
3 ft. (0.9 m.) x 4 ft. (1.2 m.)	
CENTRE	WEC220304
END	WEE220304
INDIVIDUAL	WEI220304

Personal Comfort Station




HEAVY DUTY

EXCELLENT CHEMICAL RESISTANCE IN AN INTERLOCKING MODULAR ANTI-FATIGUE TILE

- Open top construction allows drainage while still providing support.
- Available with a grit top surface for increased slip resistance.
- Includes alternating yellow and black edging on 3 sides.
- Custom options available.

PERFECT FOR: wet areas, machining and manufacturing

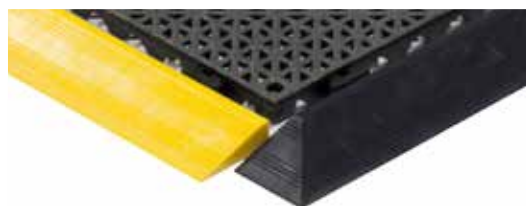

#22 BLACK

construction	Recycled PVC
edging	Available
thickness	3/4 in. (19.1 mm.)
total weight	0.7 kg. (1.5 lbs.)
warranty	1 year
recycled content: 100%	

size	part code
2 ft. (0.6 m.) x 2 ft. (0.6 m.)	PCS220202, PCG220202
2 ft. (0.6 m.) x 3 ft. (0.9 m.)	PCS220203, PCG220203
2 ft. (0.6 m.) x 4 ft. (1.2 m.)	PCS220204, PCG220204
2 ft. (0.6 m.) x 5 ft. (1.5 m.)	PCS220205, PCG220205
2 ft. (0.6 m.) x 7 ft. (2.1 m.)	PCS220207, PCG220207
3 ft. (0.9 m.) x 4 ft. (1.2 m.)	PCS220304, PCG220304
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	PCS220305, PCG220305
3 ft. (0.9 m.) x 7 ft. (2.1 m.)	PCS220307, PCG220307
3 ft. (0.9 m.) x 9 ft. (2.7 m.)	PCS220309, PCG220309
*Note: PCS= Standard, PCG= Grit Top Surface	

Weldeez™ Modular

HEAVY DUTY

EXTREMELY EFFECTIVE WELDING MAT DESIGNED TO WITHSTAND SPARKS, WELDING FLUX AND SLAG

- Capable of withstanding temperatures up to 1500°C.
- Highly resistant to grease.
- Provides a comfortable surface.
- Superior durability.
- Fully modular interlocking mats.

PERFECT FOR: welders, forges, machinists and the oil and gas industry



#22 BLACK

construction	Rubber (specially compounded nitrile)
face style	Pebbled
edging	Modular
thickness	5/8 in. (16 mm.)
total weight	12.7 kg. (28 lbs.)
flammability	Flame resistant
warranty	5 year

size	part code
3 ft. (0.9 m.) x 3 ft. (0.9 m.)	WEM220303

3M™ Safety-Walk™ Cushion Matting 5100



HEAVY DUTY

HEAVY DUTY ANTI-FATIGUE MATTING

- Ridged upper surface provides a high traction top.
- Grips the floor and your feet, creating a safer work area.
- Heavy duty PVC Z-web construction is highly resistant to bacteria, grease and cleaners.
- Very durable and effective.

PERFECT FOR: workstations, wet areas, kitchens and bars

construction	Vinyl Z-web
face style	Z-web
edging	Available
thickness	7/16 in. (11 mm.)
total weight	6.40 kg./sq. m. (1.31 lbs./sq. ft.)
flammability	DOC FF 1-70: Passes
warranty	1 year

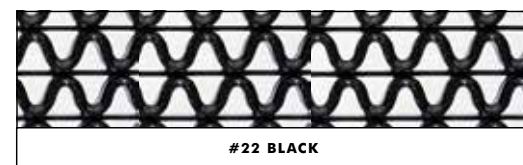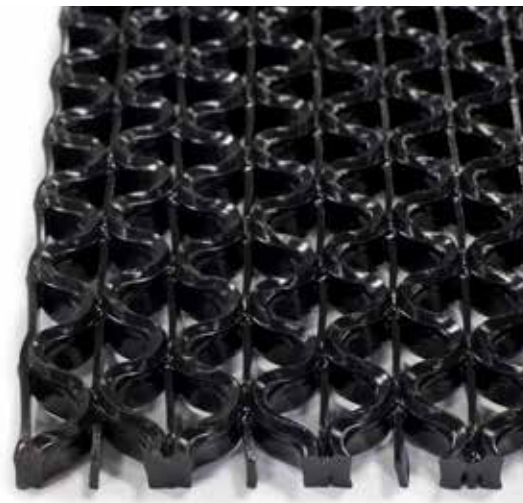

size	part code
3 ft. (0.9 m.) Roll*	3M510220300
*Roll length 50 ft. (15.2 m.) +/-	

Competitor Series

eco FRIENDLY RECYCLED CONTENT

HEAVY DUTY

ABSORB IMPACT FROM HIGH TRAFFIC WITH OUR THICK ANTI-FATIGUE MAT

- Extremely durable and slip resistant.
- Easy to clean and maintain.
- Available in standard black and grease-resistant orange.
- Available in both linear interlocking and individual mats.

PERFECT FOR: kitchens, mechanic shops, manufacturing and the oil and gas industry

construction	Rubber (natural/nitrile)
face style	Perforated
edging	Integrated
thickness	7/8 in. (22 mm.)
total weight	21.1 kg. (46.4 lbs.)
warranty	Standard - 3 year, Grease resistant - 5 year
recycled content: 15-22%	



size	part code
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	
	CENTRE CBCCC0305
	END CBEECC0305
	INDIVIDUAL CBICCC0305
	CC = Colour number

Plasti-Grip Industrial

eco FRIENDLY RECYCLED CONTENT



HEAVY DUTY

EXCELLENT CHEMICAL, GREASE AND SLIP RESISTANT ANTI-FATIGUE MAT

- Great for tough environments.
- Anti-microbial and UV-resistant PVC composition.
- Made with 100% recycled content.
- Provides adequate drainage.

PERFECT FOR: workstations, machining and spill zones

construction	Vinyl grid
face style	Textured grid
edging	Available
thickness	9/16 in. (14.5 mm.)
total weight	7.00 kg./sq. m. (1.43 lbs./sq. ft.)
warranty	1 year
recycled content: 100%	

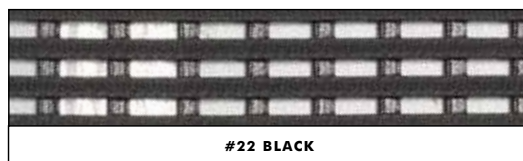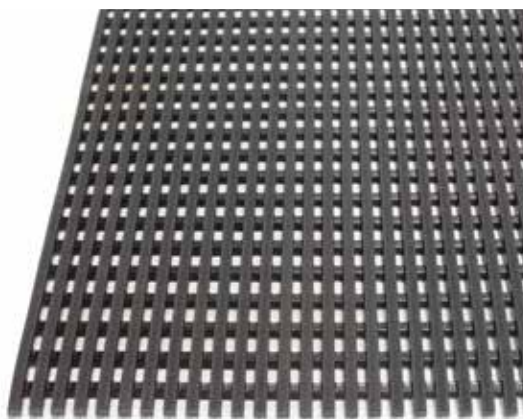

size	part code
2 ft. (0.6 m.) Roll*	PGI220200
3 ft. (0.9 m.) Roll*	PGI220300
4 ft. (1.2 m.) Roll*	PGI220400
*Roll length 33 ft. (10 m.) +/-	

Journeyman

Leader in Innovation

MEDIUM DUTY

LIGHTWEIGHT MATTING WITH TEXTURED BACKING

- Chemical resistant.
- The bubble top surface enhances micro-muscle movements for superior anti-fatigue benefits.
- Optional stable mat grip to ensure mat stays in place on smooth floors and looped pile carpet.

PERFECT FOR: labs, food prep areas and work benches

face style	Domed bubble top
edging	Integrated
total weight	1.59 kg. (3.5 lbs.)
thickness	14 mm. (9/16 in.)
colour	Black
surface	Solid top
construction	Polyurethane foam
warranty	1 year



size	part code
2 ft. (0.6 m.) x 3 ft. (0.9 m.)	PBM220203

Executive

Leader in Innovation

MEDIUM DUTY

A NEW CLASS OF MAT FOR THE OFFICE

- Resistant to grease and heat.
- Lightweight and slip-resistant.
- Very good heel puncture resistance.
- Optional stable mat grip to ensure mat stays in place on smooth floors and looped pile carpet.

PERFECT FOR: pharmacies, sit-stand workstations and offices

face style	Textured
edging	Tapered edges (round corners)
total weight	1.64 kg. (3.6 lbs.)
thickness	17 mm. (11/16 in.)
colour	Black
surface	Solid top
construction	Polyurethane rubber foam
warranty	1 year



size	part code
2 ft. (0.6 m.) x 3 ft. (0.9 m.)	RHD220203

Work Matta™ Excel Solid Top

eco FRIENDLY RECYCLED CONTENT

MEDIUM DUTY

DESIGNED TO HELP REDUCE SHOCK IMPACTS

- Highly durable.
- Modular interlocking system enables easy installation and customization, making it ideal for any job.
- Slip-resistant.
- Solid top surface allows for easy clean-up.
- Also available with ESD surface for electronics protection.

PERFECT FOR: assembly lines, work benches and industrial facilities

construction	Recycled PVC
edging	Available
thickness	1 in. (25.4 mm.)
total weight	3 kg. (6.4 lbs.)
warranty	10 year

recycled content: 100%



size	part code
20 in. x 20 in. (0.5 m. x 0.5 m.)	XSS222020
FEMALE CORNER	XFC ^{CC} 0424
MALE CORNER	XCM ^{CC} 0424
FEMALE EDGE	XRF ^{CC} 0420
MALE EDGE	XRM ^{CC} 0420

Accessory colours: 22 Black, 37 Yellow ^{CC} = Colour number

Apprentice

Leader in Innovation


MEDIUM DUTY

A NEW CLASS OF MAT FOR THE SERVICE INDUSTRY

- Resistant to grease and heat.
- Lightweight and slip-resistant.
- Optional stable mat grip to ensure mat stays in place on smooth floors and looped pile carpet.

PERFECT FOR: food areas, check outs and work benches

face style	Textured
edging	Beveled
total weight	3.42 kg./sq. m. (0.70 lbs./sq. ft.)
thickness	17 mm. (11/16 in.)
colour	Black
surface	Solid top
construction	Polyurethane rubber foam
warranty	1 year

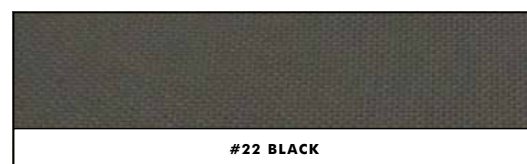

size	part code
2 ft. (0.6 m.) x 3 ft. (0.9 m.)	HDS220203
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	HDS220305
4 ft. (1.2 m.) x 6 ft. (1.8 m.)	AFS220406

Work Matta™ Excel Open Top

eco FRIENDLY RECYCLED CONTENT

MEDIUM DUTY


AN EXCELLENT BALANCE OF DURABILITY AND ERGONOMICS

- Slip-resistant with efficient drainage.
- Textured open top surface increases slip resistance while allowing efficient drainage.
- Modular interlocking system enables easy installation and customization, making it ideal for any job.

PERFECT FOR: assembly lines, work benches and industrial facilities

construction	Recycled PVC
edging	Available
thickness	1 in. (25.4 mm.)
total weight	2.1 kg. (4.6 lbs.)
warranty	10 year

recycled content: 100%

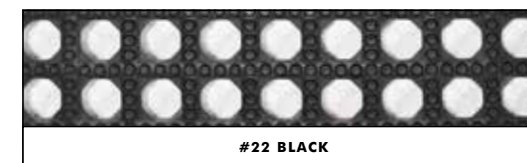

size	part code
20 in. x 20 in. (0.5 m. x 0.5 m.)	XOS222020
FEMALE CORNER	XFC ^{CC} 0424
MALE CORNER	XCM ^{CC} 0424
FEMALE EDGE	XRF ^{CC} 0420
MALE EDGE	XRM ^{CC} 0420

Accessory colours: 22 Black, 37 Yellow ^{CC} = Colour number

Work Matta™ Ergo Solid Top




MEDIUM DUTY

HIGHLY VERSATILE ERGONOMIC TILE WITH MODULAR INTERLOCKING SYSTEM

- Excellent slip resistance with a diamond shield surface.
- Easy to install and customize.
- Solid top surface allows for easy clean-up.
- Also available with ESD surface for the protection of electronics.

PERFECT FOR: assembly lines, work benches and industrial facilities

construction	Recycled PVC
edging	Available
thickness	9/16 in. (14.2 mm.)
total weight	0.95 kg. (2.1 lbs.)
warranty	10 year
recycled content: 100%	

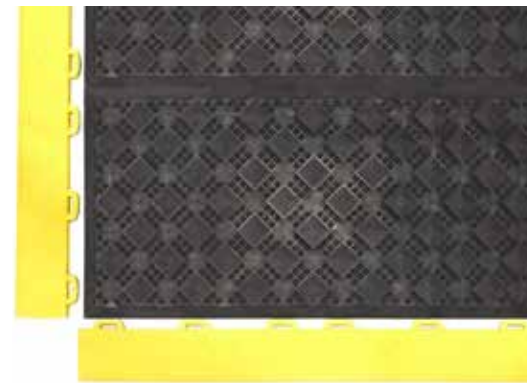

size	part code
10 in. x 20 in. (0.25 m. x 0.5 m.)	RSS221020
FEMALE CORNER	RCFCC0424
MALE CORNER	RCMCC0424
FEMALE EDGE	RRFCC0420
MALE EDGE	RRMCC0420
Accessory colours: 22 Black, 37 Yellow CC = Colour number	

Foam Fusion™



MEDIUM DUTY

LAMINATED LONG-LASTING PVC FOAM CREATES A COMFORTABLE CUSHIONED ANTI-FATIGUE SURFACE

- Easy to clean and provides comfort for a full work day.
- Slip-resistant diamond plate surface handles the wear of traffic.
- Beveled edging available.

PERFECT FOR: machine operating, assembly lines, work benches and warehouses

face construction	Solid
face style	Diamond plate
face material	Vinyl (PVC)
backing	Vinyl (PVC) foam
edging	Tapered edges
thickness	5/8 in. (16 mm.)
total weight	7.50 kg./m. (1.54 lbs./sq. ft.)
warranty	1 year
recycled content: 35%	



size	part code
2 ft. (0.6 m.) x 3 ft. (0.9 m.)	FMFCC0203
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	FMFCC0305
rolls	part code
2 ft. (0.6 m.) Roll*	FMFCC0200
3 ft. (0.9 m.) Roll*	FMFCC0300
4 ft. (1.2 m.) Roll*	FMFCC0400
*Roll length 75 ft. (23 m.) +/- CC = Colour number	

Work Matta™ Ergo Open Top




MEDIUM DUTY

HIGHLY VERSATILE ERGONOMIC TILE

- Slip-resistant textured surface.
- Open top allows for efficient drainage.
- Easy to install.
- Easy to customize modular interlocking system.
- Very comfortable.

PERFECT FOR: wet work areas, swimming pools and shower rooms

construction	Recycled PVC
edging	Available
thickness	9/16 in. (14.2 mm.)
total weight	0.82 kg. (1.8 lbs.)
warranty	10 year
recycled content: 100%	

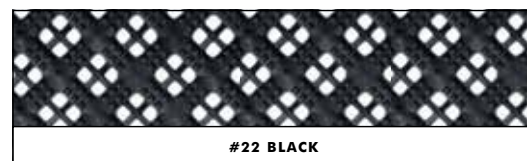

size	part code
10 in. x 20 in. (0.25 m. x 0.5 m.)	ROS221020
FEMALE CORNER	RCFCC0424
MALE CORNER	RCMCC0424
FEMALE EDGE	RRFCC0420
MALE EDGE	RRMCC0420
Accessory colours: 22 Black, 37 Yellow CC = Colour number	

Competitor Series Light





MEDIUM DUTY

TOUGH YET LIGHTWEIGHT ANTI-FATIGUE MAT. EASY TO MOVE WHILE MAINTAINING ITS SUPERIOR SLIP RESISTANCE

- Easy to clean and maintain.
- Available in standard black and grease-resistant orange.
- Mats larger than 3' x 5' are seamed.

PERFECT FOR: kitchens, mechanic shops, manufacturing and the oil and gas industry

construction	Rubber (natural/nitrile)
face style	Perforated
edging	Integrated
thickness	9/16 in. (14.5 mm.)
total weight	10.4 kg. (22.8 lbs.)
warranty	Standard - 3 year, Grease resistant - 5 year
recycled content: 15–22%	



size	part code
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	CSLCC0305
3 ft. (0.9 m.) x 10 ft. (3.0 m.)	seamed mat
3 ft. (0.9 m.) x 15 ft. (4.6 m.)	seamed mat
3 ft. (0.9 m.) x 20 ft. (6.0 m.)	seamed mat

Kineta-Flex™


MEDIUM DUTY

HIGH QUALITY, VERY DURABLE ANTI-FATIGUE MAT

- Domed construction of the flexible rubber provides extremely long-lasting anti-fatigue properties.
- Available in standard grey or grease-resistant black rubber.
- Slip-resistant solid top is easy to clean.
- Available in both linear interlocking and individual mats.

PERFECT FOR: workstations, mechanic shops, manufacturing and the oil and gas industry

construction	Rubber (natural/nitrile)
face style	Domed bubble top
edging	Integrated
thickness	9/16 in. (14.5 mm.)
total weight	9.25 kg./sq. m. (1.89 lbs./sq. ft.)
warranty	Standard - 3 year, Grease-resistant - 5 year

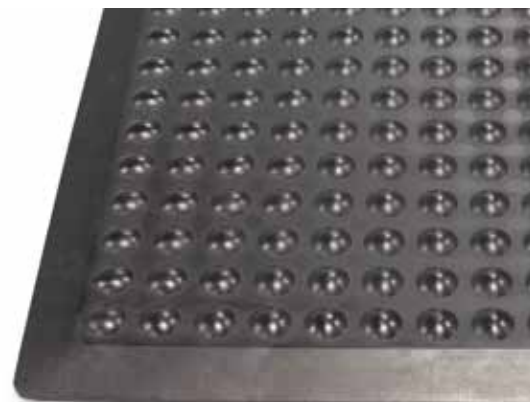

size	part code
2 ft. (0.6 m.) x 3 ft. (0.9 m.)	KFIC0203
3 ft. (0.9 m.) x 4 ft. (1.2 m.)	KFIC0304
31.5 in. x 11.5 in.	END KFEC3212
31.5 in. x 26 in.	CENTRE KFCC3226

CC = Colour number

eco FRIENDLY RECYCLED CONTENT

MEDIUM DUTY

Flex Comfort Drain


LIGHTWEIGHT ANTI-FATIGUE MATTING

- Excellent resistance to grease and oils.
- 100% nitrile composition.
- Perforated to allow drainage.
- Ideal for kitchen use.

PERFECT FOR: kitchens, mechanic shops, manufacturing and the oil and gas industry

construction	Rubber (nitrile)
face style	Textured raised surface
edging	Integrated
thickness	3/8 in. (9.5 mm.)
total weight	7.75 kg. (17.0 lbs.)
warranty	3 year

recycled content: 5%

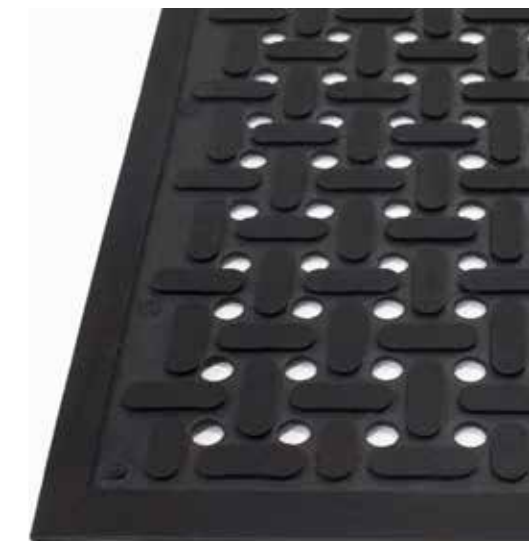

size	part code
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	FCD220305

3M™ Safety-Walk™ Cushion Matting 5270

MEDIUM DUTY

LONG-LASTING ANTI-FATIGUE MAT

- Textured surface is slip-resistant.
- Coiled vinyl loops underneath surface provide compaction-resistant anti-fatigue cushioning and superior grip to the floor.

PERFECT FOR: workstations, walkways and assembly lines

face style	Textured surface
face material	Vinyl (PVC)
backing	Vinyl loop
edging	Available
thickness	(5/8 in.) 16 mm.
total weight	5.42 kg./sq. m. (1.11 lbs./sq. ft.)
flammability	DOC FF 1-70: Passes
warranty	1 year



size	part code
3 ft. (0.9 m.) Roll*	3M527220300

*Roll length 50 ft. (15.2 m.) +/-

eco FRIENDLY RECYCLED CONTENT

MEDIUM DUTY

Plasti-Grip




EXCELLENT CHEMICAL, GREASE AND SLIP-RESISTANT ANTI-FATIGUE MAT

- Anti-microbial and UV-resistant PVC composition makes this mat a great choice for tough environments.
- Cost effective with good drainage.
- Embossed top creates an excellent anti-slip surface.
- Flexible suspended PVC top ribbing provides comfortable, stable cushioning—even for bare feet.

PERFECT FOR: workstations, machining and spill zones

construction	Vinyl grid
face style	Textured grid
edging	Available
thickness	1/2 in. (12.5 mm.)
total weight	6.80 kg./sq. m. (1.39 lbs./sq. ft.)
warranty	1 year

recycled content: 50%

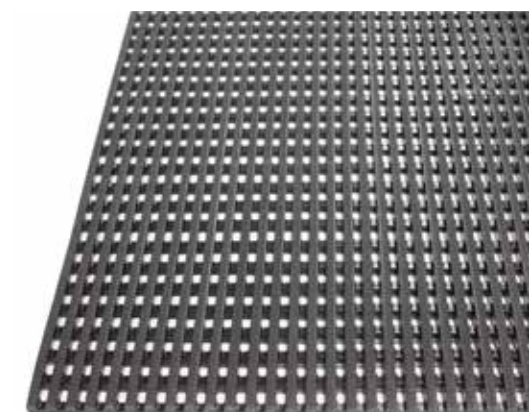

size	part code
2 ft. (0.6 m.) Roll*	PGWCC0200
3 ft. (0.9 m.) Roll*	PGWCC0300
4 ft. (1.2 m.) Roll*	PGWCC0400

*Roll length 33 ft. (10 m.) +/- CC = Colour number

Value Flex Solid Top

LIGHT DUTY

GREAT VALUE ANTI-FATIGUE MATTING

- Excellent traction.
- Interlocking edges.

PERFECT FOR: warehouses, work benches and machine-operating



size	part code
3 ft. (0.9 m.) x 3 ft. (0.9 m.)	VFS220303

construction	Rubber
face style	Solid top
thickness	14.5 mm (9/16 in)
total weight	7.6 kg. (16.8 lbs.)
warranty	1 year

eco FRIENDLY RECYCLED CONTENT


LIGHT DUTY

Value Flex Plus

GREAT VALUE ANTI-FATIGUE MATTING

- Excellent traction.
- Open top for drainage.
- Integrated beveled edge.

PERFECT FOR: warehouses, work benches and machine-operating

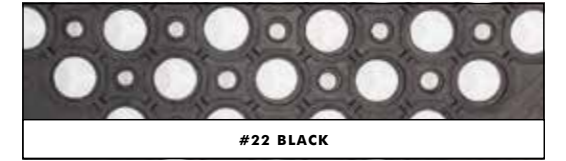

size	part code
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	VF+220305

construction	Rubber
face style	Perforated
edging	Integrated
thickness	1/2 in. (12.5 mm.)
total weight	9.0 kg. (19.8 lbs.)
warranty	1 year

recycled content: 22%

Value Flex Open Top

LIGHT DUTY

GOOD VALUE ANTI-FATIGUE MATTING

- Excellent traction.
- Holes allow for drainage.
- Interlocking edges.
- Great for a wide variety of applications.

PERFECT FOR: warehouses, work benches and machine-operating



size	part code
3 ft. (0.9 m.) x 3 ft. (0.9 m.)	VFX220303

construction	Rubber
face style	Perforated
thickness	9/16 in. (14.5 mm.)
total weight	6 kg. (13 lbs.)
warranty	1 year

eco FRIENDLY RECYCLED CONTENT

LIGHT DUTY

Bubble Mat

TOUGH AND ECONOMICAL, THIS MAT IS PERFECT FOR DRY WORKSTATIONS

- Bubble top encourages micro-muscle movements, increasing circulation to the legs.
- Available in both linear interlocking and individual mats.

PERFECT FOR: machine-operating, assembly lines, work benches and warehouses



size	part code
2 ft. (0.6 m.) x 3 ft. (0.9 m.)	
	CENTRE BMCC0203
	INDIVIDUAL BMIC0203
	END BMEC0203
3 ft. (0.9 m.) x 4 ft. (1.2 m.)	
	CENTRE BMCC0304
	INDIVIDUAL BMIC0304
	END BMEC0304

CC = Colour number

construction	Rubber
face style	Domed bubble top
edging	Integrated
thickness	5/8 in. (16 mm.)
total weight	7.30 kg./sq. m. (1.50 lbs./sq. ft.)
warranty	1 year

recycled content: 54%

3M™ Safety-Walk™ Cushion Matting 3270


LIGHT DUTY

SLIP-RESISTANT TEXTURED SURFACE.

- Reduce slips and falls with this light duty anti-fatigue mat.
- Coiled vinyl loops underneath surface are compact-resistant.
- Edging available in black or yellow.
- Vinyl loops provide strong adhesion to the floor.

PERFECT FOR: workstations, walkways and assembly lines

face style	Textured surface
face material	Vinyl (PVC)
backing	Vinyl loop
edging	Available
thickness	(9/16 in.) 14.5 mm.
total weight	4.51 kg./sq. m. (0.92 lbs./sq. ft.)
flammability	DOC FF 1-70: Passes, ASTM D-2859: Passes NFPA 253: Class I
warranty	1 year

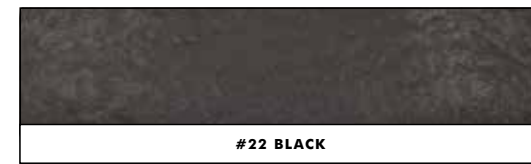

size	part code
3 ft. (0.9 m.) Roll*	3M327220300
*Roll length 60 ft. (18.3 m.) +/-	

Airsoft™ Pebbled

LIGHT DUTY

ECONOMICAL AND EFFECTIVE ANTI-FATIGUE MAT

- Reduces likelihood of long-term musculoskeletal disorders (MSDs).
- Pebbled surface is easy to clean.

PERFECT FOR: cashiers, offices and workstations

construction	Vinyl (PVC) foam
face style	Pebbled
edging	Tapered edges
thickness	3/8 in. (9.5 mm.)
total weight	2.90 kg./sq. m. (0.59 lbs./sq. ft.)
warranty	1 year



size	part code
2 ft. (0.6 m.) x 3 ft. (0.9 m.)	ASPCC0203
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	ASPCC0305
3 ft. (0.9 m.) x 10 ft. (3.0 m.)	ASPCC0310
rolls	part code
2 ft. (0.6 m.) Roll*	ASPCC0200
3 ft. (0.9 m.) Roll*	ASPCC0300
4 ft. (1.2 m.) Roll*	ASPCC0400
*Roll length 60 ft. (18.3 m.) +/- CC = Colour number	

Airsoft™ Ribbed

LIGHT DUTY

RIBBED SURFACE FOR ENHANCED TRACTION

- Economical and effective.
- Improves worker productivity.
- Decreases risk of long-term musculoskeletal disorders (MSDs).

PERFECT FOR: cashiers, offices and workstations

construction	Vinyl (PVC) foam
face style	Ribbed
edging	Tapered edges
thickness	3/8 in. (9.5 mm.)
total weight	2.90 kg./sq. m. (0.59 lbs./sq. ft.)
warranty	1 year



size	part code
2 ft. (0.6 m.) x 3 ft. (0.9 m.)	ASRCC0203
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	ASRCC0305
3 ft. (0.9 m.) x 10 ft. (3.0 m.)	ASRCC0310
rolls	part code
2 ft. (0.6 m.) Roll*	ASRCC0200
3 ft. (0.9 m.) Roll*	ASRCC0300
4 ft. (1.2 m.) Roll*	ASRCC0400
*Roll length 60 ft. (18.3 m.) +/- CC = Colour number	

Airsoft™ Plus Pebbled


LIGHT DUTY

ANTI-FATIGUE MAT WITH ENHANCED SHOCK ABSORBING PROPERTIES

- Thicker foam than Airsoft™ Pebbled.
- Boosts worker productivity.
- Reduces risk of long-term musculoskeletal disorders (MSDs).
- Easy to clean pebbled surface.

PERFECT FOR: cashiers, offices and workstations

construction	Vinyl (PVC) foam
face style	Pebbled
edging	Tapered edges
thickness	5/8 in. (16 mm.)
total weight	4.80 kg./sq. m. (0.98 lbs./sq. ft.)
warranty	1 year

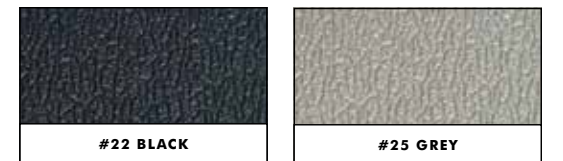

size	part code
2 ft. (0.6 m.) x 3 ft. (0.9 m.)	APPCC0203
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	APPCC0305
3 ft. (0.9 m.) x 10 ft. (3.0 m.)	APPCC0310
rolls	part code
2 ft. (0.6 m.) Roll*	APPCC0200
3 ft. (0.9 m.) Roll*	APPCC0300
4 ft. (1.2 m.) Roll*	APPCC0400
*Roll length 60 ft. (18.3 m.) +/- CC = Colour number	

industrial matting

Industrial mats perform in the most demanding environments – find your solution with Edgewood.

Industrial matting products are designed to protect workers and your workplace environment. These mats can improve safety with enhanced traction and protect your equipment and workspace from impact damage. Industrial matting can be effective in wet or dry environments.



HEAVY DUTY

Diamond Rubber

MULTI-DIRECTIONAL SLIP-RESISTANT RUNNER MAT

- Economical mat with tough surface protection.
- Great for marking pedestrian walkways or as a tactile warning strip.

PERFECT FOR: work surfaces, increasing traction and protecting floor surfaces



construction	Rubber (natural/recycled)
face style	Diamond plate
thickness	1/8 in. (3 mm.), 1/4 in. (6.5 mm.)
total weight	1/8 in. - 3.66 kg./sq. m. (0.75 lbs./sq. ft.) 1/4 in. - 6.10 kg./sq. m. (1.25 lbs./sq. ft.)
warranty	1 year
recycled content: 70%	

size	part code
3 ft. (0.9 m.) Roll*	DRQ220300, DRS220300
4 ft. (1.2 m.) Roll*	DRQ220400, DRS220400
5 ft. (1.5 m.) Roll*	DRS220500
*Roll length 75 ft. (23 m.) +/- Note: DRQ=1/4 in. thick, DRS=1/8 in. thick	


HEAVY DUTY

Diamond Vinyl Commercial

WATERPROOF, STAIN AND MOLD-RESISTANT VINYL FLOOR COVER

- Embossed surface provides increased traction.
- Withstands heavy foot traffic.
- Tough enough to park cars on.

PERFECT FOR: concrete floors, garages, commercial buildings and cargo trailers

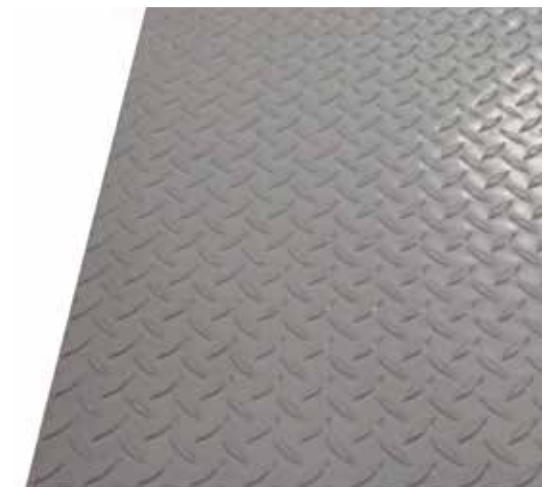

construction	Vinyl (PVC)
face style	Diamond plate
thickness	1/8 in. (3 mm.)
total weight	2.94 kg./sq. m. (0.60 lbs./sq. ft.)
flammability	GM 9070P Flammability Test: DNI (Does Not Ignite)
warranty	1 year

size	part code
10 ft. (3 m.) x 60 ft. (18.3 m.)	DVCC1000
CC = Colour number	

Specifications subject to change without notice. See product info sheet for more details.

Wide Rib Nitrile

HEAVY DUTY

SLIP-RESISTANT, 100% NITRILE RUBBER RUNNER MAT OFFERS STRONG WORK SURFACE PROTECTION

- Provides increased traction.
- Superior grease resistance.
- Good pedestrian walkway or tactile warning product.
- Can be used to line tool cribs and work benches.

PERFECT FOR: grease/oil work zones, work surfaces, increasing traction and protecting floor surfaces



construction	Rubber (nitrile)
face style	Wide rib
thickness	1/8 in. (3 mm.), 1/4 in. (6.5 mm.)
total weight	1/8 in. - 3.66 kg./sq. m. (0.75 lbs./sq. ft.) 1/4 in. - 6.10 kg./sq. m. (1.25 lbs./sq. ft.)
warranty	1 year

size	part code
3 ft. (0.9 m.) Roll*	WNQ220300, WNS220300
4 ft. (1.2 m.) Roll*	WNQ220400, WNS220400

*Roll length 75 ft. (23 m.) +/-
Note: WNQ=1/4 in. thick, WNS=1/8 in. thick



Wide Rib Rubber

eco FRIENDLY RECYCLED CONTENT

HEAVY DUTY

ECONOMICAL RUNNER MAT FOR WORK SURFACE PROTECTION

- Linear rib design provides slip resistance.
- Rubber construction ensures effectiveness at low temperatures.
- Offers tough work surface protection and increased traction.
- 1/4" only available in black.

PERFECT FOR: work surfaces, increasing traction and protecting floor surfaces



construction	Rubber (natural/recycled)
face style	Wide rib
thickness	1/8 in. (3 mm.), 1/4 in. (6.5 mm.)
total weight	1/8 in. - 3.66 kg./sq. m. (0.75 lbs./sq. ft.) 1/4 in. - 6.10 kg./sq. m. (1.25 lbs./sq. ft.)
warranty	1 year

recycled content: 70%

size	part code
2 ft. (0.6 m) Roll*	WRQ220200, WRSCC0200
3 ft. (0.9 m.) Roll*	WRQ220300, WRSCC0300
4 ft. (1.2 m.) Roll*	WRQ220400, WRSCC0400

*Roll length 75 ft. (23 m.) +/- CC = Colour number
Note: WNQ=1/4 in. thick, WNS=1/8 in. thick

Fine Rib Rubber

eco FRIENDLY RECYCLED CONTENT

HEAVY DUTY

SLIP-RESISTANT ECONOMICAL RUNNER MAT

- Tough work surface protection.
- V-groove design provides a high traction surface.
- Tight pattern enables light wheeled loads to cross unimpeded.

PERFECT FOR: work surfaces, increasing traction and protecting floor surfaces



construction	Rubber (natural/recycled)
face style	Fine rib
thickness	1/8 in. (3 mm.)
total weight	3.66 kg./sq. m. (0.75 lbs./sq. ft.)
warranty	1 year

recycled content: 70%

size	part code
2 ft. (0.6 m) Roll*	FRR220200
3 ft. (0.9 m.) Roll*	FRR220300
4 ft. (1.2 m.) Roll*	FRR220400

*Roll length 75 ft. (23 m.) +/-

Weldeez™ Roll

HEAVY DUTY

EXTREMELY EFFECTIVE WELDING MAT DESIGNED TO WITHSTAND SPARKS, WELDING FLUX AND SLAG

- Withstands high temperatures.
- Highly grease-resistant.
- Very comfortable with superior durability.

PERFECT FOR: welders, forges, machinists and oil and gas industry



size	part code
3 ft. (0.9 m.) Roll*	WER220300
4 ft. (1.2 m.) Roll*	WER220400
*Roll length 75 ft. (23 m.) +/-	

construction	Rubber (specially compounded nitrile)
face style	Smooth
thickness	1/8 in. (3 mm.)
total weight	4.15 kg./sq. m. (0.85 lbs./sq. ft.)
flammability	Flame-resistant
warranty	5 year


Diamond Plate Runner

MEDIUM DUTY

AN ALTERNATIVE INDUSTRIAL RUNNER MAT WITH EXCELLENT SLIP AND CHEMICAL RESISTANCE.

- Economical mat offers tough work surface protection and increased traction.
- Comes in three colour options

PERFECT FOR: work surfaces, increasing traction and protecting floor surfaces

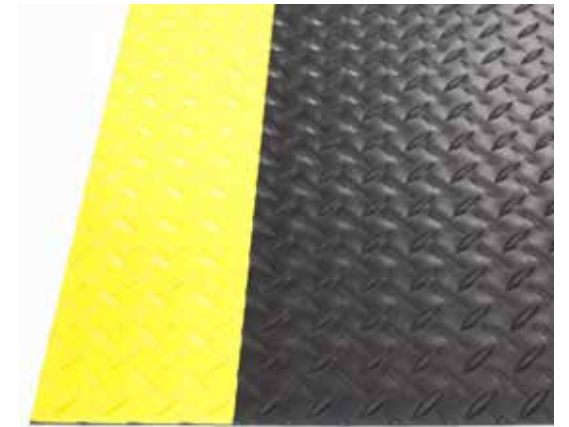

construction	Vinyl (PVC)
face style	Diamond plate
thickness	1/8 in. (3 mm.)
total weight	3.66 kg./sq. m. (0.75 lbs./sq. ft.)
colours	3
warranty	1 year

size	part code
2 ft. (0.6 m.) Roll*	DIACC0200
3 ft. (0.9 m.) Roll*	DIACC0300
4 ft. (1.2 m.) Roll*	DIACC0400
*Roll length 75 ft. (23 m.) +/- CC = Colour number	

Smooth Rubber


eco FRIENDLY RECYCLED CONTENT

HEAVY DUTY

SLIP-RESISTANT ECONOMICAL RUNNER MAT

- Offers strong work surface protection.
- Provides increased traction.
- 6.5 ft. (2 m.) available only in 1/8 in. thickness.

PERFECT FOR: work surfaces, increasing traction and protecting floor surfaces

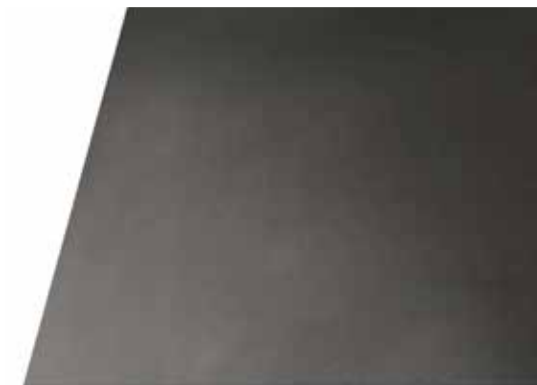

size	part code
3 ft. (0.9 m.) Roll*	SMQ220300, SMS220300
4 ft. (1.2 m.) Roll*	SMQ220400, SMS220400
6.5 ft. (2 m.) Roll*	SMS222000 (1/8 in. only)
*Roll length 75 ft. (23 m.) +/- Note: SNQ=1/4 in. thick, SNS=1/8 in. thick	

construction	Rubber (natural/recycled)
face style	Smooth
thickness	1/8 in. (3 mm.), 1/4 in. (6.5 mm.)
total weight	1/8 in. - 3.66 kg./sq. m. (0.75 lbs./sq. ft.) 1/4 in. - 6.10 kg./sq. m. (1.25 lbs./sq. ft.)
warranty	1 year
recycled content: 70%	

Wide Rib Vinyl

eco FRIENDLY RECYCLED CONTENT

MEDIUM DUTY

ECONOMICAL RUNNER MAT FOR TOUGH WORK SURFACE PROTECTION AND INCREASED TRACTION

- Vinyl construction offers greater oil, grease and chemical resistance.
- Recommended for indoor use only.

PERFECT FOR: work surfaces and walking surfaces that need protection



construction	Vinyl (PVC)
face style	Wide rib
thickness	1/8 in. (3 mm.)
total weight	3.47 kg./sq. m. (0.71 lbs./sq. ft.)
warranty	1 year
recycled content: 50%	

size	part code
3 ft. (0.9 m.) Roll*	WRV220300
4 ft. (1.2 m.) Roll*	WRV220400
*Roll length 75 ft. (23 m.) +/-	

Fine Rib Vinyl



MEDIUM DUTY

GREASE AND CHEMICAL-RESISTANT ECONOMICAL RUNNER MAT

- Provides strong work surface protection and increased traction.
- V-groove design provides a high traction surface.
- Tight pattern enables light wheeled loads to cross unimpeded.

PERFECT FOR: work surfaces and walking surfaces that need protection



construction	Vinyl (PVC)
face style	Fine rib
thickness	1/8 in. (3 mm.)
total weight	3.47 kg./sq. m. (0.71 lbs./sq. ft.)
warranty	1 year
recycled content: 50%	



#22 BLACK

size	part code
3 ft. (0.9 m.) x 105 ft. (32 m.)	FRV220300

specialty matting

Edgewood offers specialty matting solutions that address a range of specific requirements and application situations.

Matting is the first line of defense when managing electrically sensitive areas, contamination concerns or biohazard control. Get long-term peace-of-mind with Edgewood's specialty matting, specifically designed and constructed to ensure that it performs as it should.

Did you know?

1. Di-electric mats are designed to prevent grounding, while anti-static mats promote grounding.
2. Plastic products are more resistant to bacteria contamination than rubber.
3. A good wet area mat must grip to the floor as well as it grips to the feet.

Airsoft™ Anti-Stat

ELECTRICAL

FOAM BASED ANTI-FATIGUE MAT THAT PROTECTS SENSITIVE ELECTRONICS FROM STATIC DISCHARGE

- Has a static dissipative rating of $10^8 - 10^9$ ohms/sq. ft.
- Easy to clean textured surface.
- Grounding cord required.

PERFECT FOR: in front of computer stations, printers and in static-prone office spaces



size	part code
3 ft. (0.9 m.) Roll*	AAS250300
4 ft. (1.2 m.) Roll*	AAS250400
*Roll length 60 ft. (18.3 m.) +/-	

construction	Vinyl (PVC) foam
face style	Pebbled
edging	Tapered edges
thickness	3/8 in. (9.5 mm.)
total weight	3.22 kg./sq. m. (0.66 lbs./sq. ft.)
flammability	FMVSS 302 Flame Resistance – Pass Rating Flammability: CPSC FF-170 – Pass Rating
warranty	1 year


Anti-Stat

ELECTRICAL

VINYL ANTI-STAT MAT FOR SENSITIVE EQUIPMENT THAT REQUIRES ELECTROSTATIC DISSIPATIVE (ESD) PROTECTION

- Effective on floors or work surfaces.
- Thin to minimize tripping.
- Electrostatic dissipative properties: $7 \times 10^8 - 9 \times 10^9$ ohms/sq. ft.
- Grounding cord required.

PERFECT FOR: computer stations, printers and electrically sensitive devices

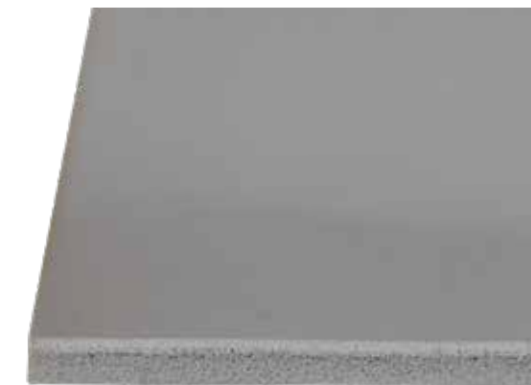

Close up to show texture



size	part code
3 ft. (0.9 m.) Roll*	ASD250300
4 ft. (1.2 m.) Roll*	ASD250400
*Roll length 50 ft. (15.2 m.) +/-	

construction	Vinyl (PVC)
face style	Pebbled
thickness	1/8 in. (3 mm.)
total weight	3.66 kg./sq. m. (0.75 lbs./sq. ft.)
warranty	1 year


Switchboard Class 2

ELECTRICAL

OZONE, OIL AND FLAME-RESISTANT HIGH VOLTAGE PROTECTION

- Slip-resistant surface.
- Dielectric test voltage: 30,000 VAC.
- Proof tested over entire surface at 20,000 VAC.
- Recommended maximum use voltage: 17,000 VAC.

PERFECT FOR: switchboards, transformers, generators and high voltage equipment



construction	Vinyl (PVC)
face style	Fine rib
thickness	1/4 in. (6.5 mm.)
total weight	7.81 kg./sq. m. (1.60 lbs./sq. ft.)
flammability	Flame-resistant
warranty	1 year

size	part code
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	SWBCC0305
3 ft. (0.9 m.) x 10 ft. (3 m.)	SWBCC0310
rolls	part code
2 ft. (0.6 m.) Roll*	SWBCC0200
3 ft. (0.9 m.) Roll*	SWBCC0300
4 ft. (1.2 m.) Roll*	SWBCC0400
*Roll length 75 ft. (23 m.) +/- CC = Colour number	


Switchboard Class 3

ELECTRICAL

OZONE, OIL AND FLAME-RESISTANT HIGH VOLTAGE PROTECTION

- Dielectric test voltage: 60,000 VAC.
- Proof tested over entire surface at 30,000 VAC.
- Recommended maximum use voltage: 26,500 VAC.

PERFECT FOR: switchboards, transformers, generators and high voltage equipment

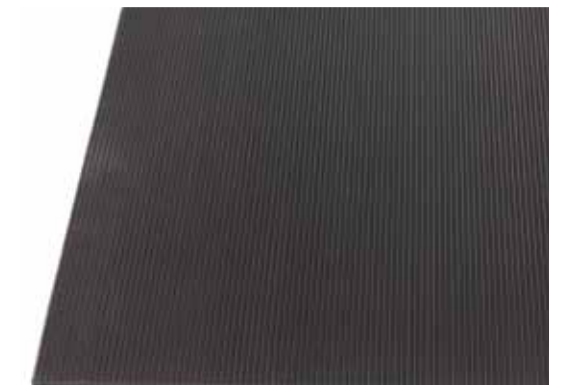

construction	Vinyl (PVC)
face style	Fine rib
thickness	3/8 in. (9.5 mm.)
total weight	12.60 kg./sq. m. (2.58 lbs./sq. ft.)
warranty	1 year

size	part code
3 ft. (0.9 m.) x 5 ft. (1.5 m.)	SW3220305
3 ft. (0.9 m.) x 10 ft. (3 m.)	SW3220310
rolls	part code
3 ft. (0.9 m.) Roll*	SW3220300
*Roll length 75 ft. (23 m.) +/-	

Coco Mat

BIODEGRADABLE

BIODEGRADABLE 100% NATURAL FIBRE SCRAPER MATS

- Economical.
- Lightweight and easy to handle.
- Great for temporary installations or quickly replaced applications.

PERFECT FOR: shops, secondary entrances and environmentally sensitive areas



#05 NATURAL

face construction	Hand-woven natural fibre
face style	Brush
face material	Coco fibre
thickness	1-3/8 in. (35 mm.)
total weight	5.08 kg./sq. m. (1.04 lbs./sq. ft.)

size	part code
14 in. x 24 in.	COC051424
16 in. x 27 in.	COC051627
18 in. x 30 in.	COC051830
20 in. x 33 in.	COC052233
22 in. x 36 in.	COC052236
24 in. x 39 in.	COC052439
26 in. x 42 in.	COC052642
30 in. x 48 in.	COC053048
36 in. x 60 in.	COC053660
48 in. x 72 in.	COC054872

Coir Matting

BIODEGRADABLE

ECONOMICAL ECO-FRIENDLY SURFACE PROTECTOR AND WIPER/SCRAPER MAT

- Biodegradable with 100% natural fibre.
- Great for temporary walkways or camp paths.
- Often used to increase traction in muddy terrain.

PERFECT FOR: shops, secondary entrances and environmentally sensitive areas



#05 NATURAL

construction	Coco fibre weave
face style	Herringbone
thickness	5/16 in. (8 mm.)
total weight	1.61 kg./sq. m. (0.33 lbs./sq. ft.)

size	part code
27 in. Roll*	COC052700
36 in. Roll*	COC053600
45 in. Roll*	COC054500
72 in. Roll*	COC057200

*Roll length 150 ft. (45.7 m.) +/-

3M™ Safety-Walk™ Wet Area Matting 1500


WET

ANTI-MICROBIAL, SLIP-RESISTANT MAT

- Creates a safe and comfortable surface to walk on, especially for bare foot traffic.
- Easy to move and maintain with a lightweight construction.
- Enhanced traction with multi-directional drainage.

PERFECT FOR: around pools, saunas and locker rooms

construction	Vinyl loop
face style	Vinyl loop
edging	Available
thickness	3/8 in. (9.5 mm.)
total weight	1.80 kg./sq. m. (0.37 lbs./sq. ft.)
flammability	DOC FF 1-70: Passes
warranty	1 year

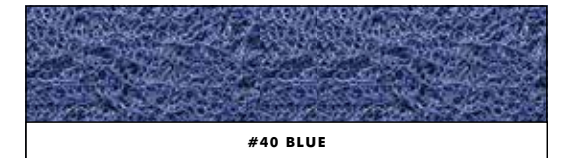

#40 BLUE

size	part code
3 ft. (0.9 m.) Roll*	3M150400300

*Roll length 50 ft. (15.2 m.) +/-

3M™ Safety-Walk™ Wet Area Matting 3200

WET

ANTI-MICROBIAL, SLIP-RESISTANT MAT


- Creates a comfortable surface to walk on.
- Very effective drainage with open construction.
- Highly durable and easy to clean.
- Mat will not crush over time.
- Resistant to mildew, fungus and other odor producers.

PERFECT FOR: around pools, saunas and locker rooms

construction	Vinyl Z-web
face style	Z-web
edging	Available
thickness	3/16 in. (5 mm.)
total weight	3.40 kg./sq. m. (0.70 lbs./sq. ft.)
flammability	DOC FF 1-70: Passes
warranty	1 year



#15 BEIGE



#40 BLUE

size	part code
3 ft. (0.9 m.) Roll*	3M320CC0300

*Roll length 50 ft. (15.2 m.) +/- CC = Colour number

V-Dek





WET

SIMPLE TO ASSEMBLE WET AREA MODULAR TILE

- Use around workstations and wet areas for superior slip resistance and drainage.
- Resistant to mildew, fungus and other odor producers.
- Anti-microbial properties.

PERFECT FOR: work benches, wet areas and pools

construction	Vinyl (PVC)
face style	Dimpled
edging	Modular
thickness	9/16 in. (14.5 mm.)
total weight	0.40 kg. (0.89 lbs.)
warranty	1 year
recycled content: 35%	

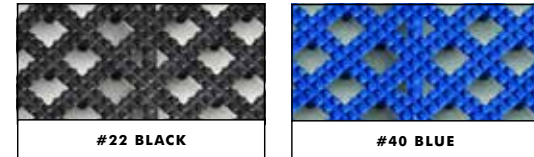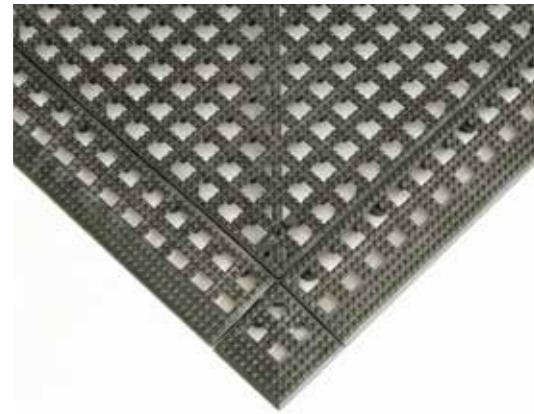

size	part code
1 ft. (0.3 m.) x 1 ft. (0.3 m.)	VDKCC0101
CORNER	VDC ^{CC} 0000
FEMALE EDGE	VFE ^{CC} 0000
MALE EDGE	VME ^{CC} 0000
CC = Colour number	

Shower Eyewash Station Mats




WET

EXCELLENT CHEMICAL RESISTANCE IN AN INTERLOCKING MODULAR ANTI-FATIGUE TILE

- Open top construction enables easy drainage.
- Ideal for safety eyewash and shower stations.
- High-visibility safety colours allow stations to be easily identified.
- Anti-slip surface keeps employees safe.
- Yellow edging on three sides.

PERFECT FOR: eyewash and shower stations and wet safety areas

construction	Recycled PVC
edging	Available
thickness	3/4 in. (19 mm.)
total weight	0.7 kg. (1.5 lbs.) per sq. ft.
warranty	1 year
recycled content: 100%	

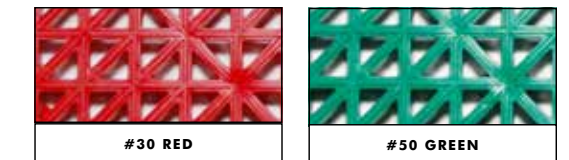

size	part code
2 ft. (0.6 m.) x 2 ft. (0.6 m.)	EWSCC0202
3 ft. (0.9 m.) x 3 ft. (0.9 m.)	EWSCC0303
CC = Colour number	

Plasti-Grip 4D




WET

EXCELLENT CHEMICAL, GREASE AND SLIP-RESISTANCE

- Great for tough environments.
- Anti-microbial and UV-resistant PVC composition.
- Spacing on top surface ensures adequate drainage.
- Drain channels allow for multi-directional flow.
- Embossed upper surface provides friction while still being soft enough for bare foot traffic.

PERFECT FOR: wet areas, shower/locker rooms and spill zones

construction	Vinyl grid
face style	Textured grid
edging	Available
thickness	1/2 in. (12.5 mm.)
total weight	6.80 kg./sq. m. (1.39 lbs./sq. ft.)
warranty	1 year
recycled content: 50%	

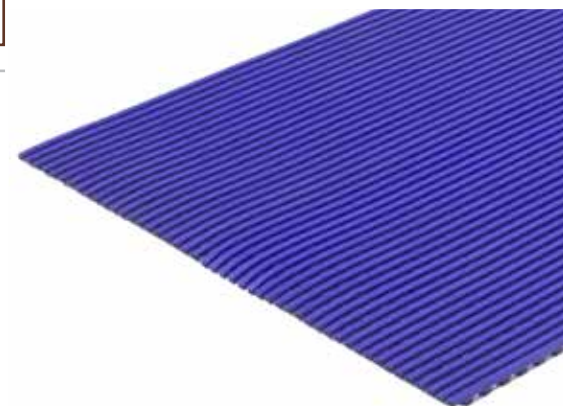

size	part code
2 ft. (0.6 m.) Roll*	PGF400200
3 ft. (0.9 m.) Roll*	PGF400300
4 ft. (1.2 m.) Roll*	PGF400400
*Roll length 33 ft. (10 m.) +/-	

Clean Room Mat

DECONTAMINATION

HI-TECH DIRT AND DUST CONTROL

- Adhesive coating traps fine soils and contaminants.
- Release adhesive backing holds mat securely in place.
- 30 easy-peeling sheets per mat; 4 mats per case; sold by the case.

PERFECT FOR: medical facilities, labs and dust sensitive environments

construction	Polyethylene film with adhesive
thickness	1/8 in. (3 mm.)
total weight	3.8 to 6.1 kg. (8.4 to 13.6 lbs.) per case of 4 mats



size	part code
18 in. x 47 in.	SNC231847
24 in. x 36 in.	SNC232436
24 in. x 45 in.	SNC232445
36 in. x 36 in.	SNC233636

Disinfectant Mat




DECONTAMINATION


EFFECTIVE FOR PASSIVE APPLICATION OF DISINFECTANT SOLUTIONS TO REDUCE THE RISK OF CONTAMINATION

- Deep well allows for excellent footwear coverage with the solution.
- Smooth corner sections are designed for easy pumping when changing the solution.

PERFECT FOR: clean rooms, labs, food processing and farms

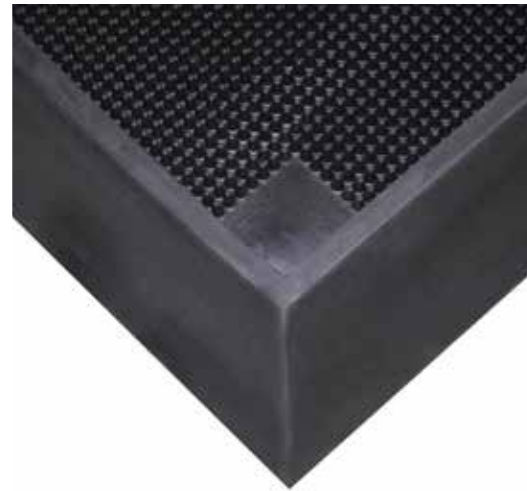

construction	Rubber
face style	Scraper fingers
edging	Integrated
thickness	2-1/2 in. (64 mm.)
total weight	11.4 kg. (25 lbs.)
warranty	1 year
recycled content: 54%	

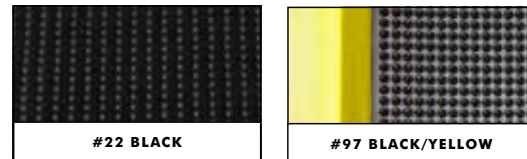

size	part code
32 in. x 39 in.	DIMCC3239
Edge colours: 22 Black, 97 Black/Yellow	
CC = Colour number	

Disinfectant Mat (Shallow Well)



DECONTAMINATION

EFFECTIVE FOR PASSIVE APPLICATION OF DISINFECTANT SOLUTIONS TO REDUCE THE RISK OF CONTAMINATION

- Chemical-resistant.
- Small, lightweight design.
- Good for portable or temporary applications.

PERFECT FOR: clean rooms, labs, food processing and farms



construction	Rubber
face style	Scraper fingers
edging	Integrated
thickness	1/2 in. (12.5 mm.)
total weight	5.5 kg. (12.2 lbs.)
warranty	1 year
recycled content: 54%	



size	part code
24 in. x 32 in.	DIM222432

accessories

Sometimes mat applications need a little something extra.

Edgewood's accessories include anti-slip products and individual mats/kneeling pads to ensure that your workplace environment is safe and clean.

Grit Tape

OPTIMUM TRACTION ON MOST SURFACES

- Peel-and-stick high traction carborundum tape.
- Minimum application temperature is 10°C.

PERFECT FOR: ramps, steps and smooth steel

face construction	Coated
face style	Grit top
face material	Carborundum
backing	Vinyl (PVC)
thickness	0.055 in. (1.40 mm.)
total weight	0.5 kg. (1.1 lbs.) per 1 in. roll



#22 BLACK

size	part code
1 in. x 60 ft.	GTP220160
2 in. x 60 ft.	GTP220260
3 in. x 60 ft.	GTP220360
6 in. x 60 ft.	GTP220660
12 in. x 60 ft.	GTP221260
18 in. x 60 ft.	GTP221860

Anti-Stat Ground Cord

LOW PROFILE GROUND CORD WITH SNAP ATTACHMENT

- Enables dissipation of static charge from anti-static mats. One cord required for every 15 sq. ft. of anti-stat matting.
- 1 meg. resistor.
- Made in accordance with: EIA 625 MIL HDBK 263 MIL STD 1686 EOS/ESD.

PERFECT FOR: computer stations, printers and electrically-sensitive devices

warranty | 1 year



size	part code
10 ft. (3 m.)	GRC000010
15 ft. (4.6 m.)	GRC000015

Wristband Ground Cord

ADJUSTABLE FABRIC WRISTBAND GROUNDER

- 1 meg. resistor.

Heel Grounder Cup Style

ADJUSTABLE FABRIC GROUNDER

- 1 meg. resistor.



size	part code
6 ft. (1.8 m.)	GRW000006




size	part code
Adjustable	GRH000000

Kneezeez

A GREAT GENERAL PURPOSE KNEELING PAD

- Built-in handle for ease of use.
- Tough closed cell foam helps reduce the strain on your knees when working on the floor.
- Chemical/oil-resistant for almost all working conditions.

construction	Nitrile foam
face style	Smooth
thickness	1 in. (25.5 mm.)
total weight	350 g. (0.77 lbs.)
warranty	1 year



#22 BLACK

size	part code
14 in. x 21 in.	KNE221421

Rubber Boot Scraper

EFFECTIVELY SCRAPES OFF HEAVY SOIL AND DEBRIS

- Durable boot scraper designed to be mounted in place.
- Pre-drilled holes for easy installation.

construction	Rubber (natural)
face style	Scraper fingers
total weight	2.0 kg. (4.4 lbs.)
warranty	1 year



#22 BLACK

size	part code
12.6 in. x 15.4 in.	RBS220000

Rubber Boot Tray

INEXPENSIVE SOLUTION FOR CONTAINMENT OF WATER, SNOW AND SOIL FROM OUTDOOR FOOTWEAR

- Flexible rubber construction ensures it will not crack or break.
- Handles outdoor temperatures.

construction	Rubber
face style	Ribbed
edging	Integrated
thickness	1 in. (25.5 mm.)
total weight	1.7 kg. (3.75 lbs.)
warranty	1 year



#22 BLACK

size	part code
16 in. x 32 in.	BTT221632



edmonton

18120 109 Avenue NW
Edmonton, AB
T5S 2K2

T : 780.466.2084
F : 780.468.9104

vancouver

Unit 407
19100 Airport Way
Pitt Meadows, BC
V3Y 0E2

T : 604.465.4467
F : 604.465.4400

toronto

45 Armthorpe Road
Brampton, ON
L6T 5M4

T : 905.793.1084
F : 905.793.8504

Inquiries@edgewoodgroup.ca
canada-wide toll free: 1.800.668.1776